

# Roman Blinds

## Fitting & Operating Instructions


### Child Safety Device – Fitting Instructions

## FITTING INSTRUCTIONS

# 1

### Outside Recess

If fitting the blind to the outside of window recess, measurements C will need to be the same.

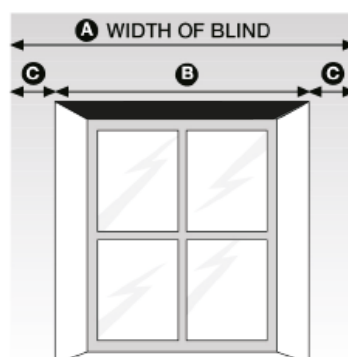


### Inside Recess

You should top fix to your window recess.

# 2

### Positioning

Place the headrail in fitting position. Space the brackets evenly. Leave 3cm clearance from both ends to prevent interference with any headrail mechanisms.

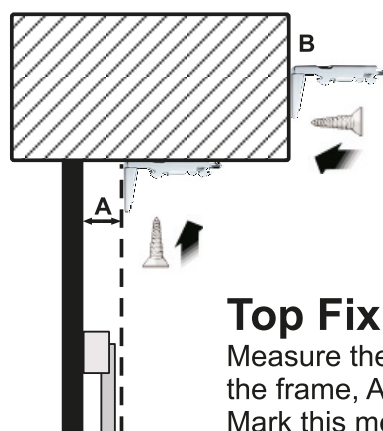

### Face Fixing

Position bracket with the shorter return side against wall facing downward. Mark through the holes for your drilling points.

### Top Fixing (inside recess)

Measure the distance any handles protrude from the frame, A. Mark this measurement on the lintel and use it to position the back of the bracket. Mark through the holes for your drilling points.

# Roman Blinds Fitting & Operating Instructions


**Note to installer:** Please ensure a general shield safety warning tag is fitted on the product.

The Installation of this product can be completed by non-professionals.

## WARNING

According to EN 13120

- Young children can be strangled by loops in pull cords, chains, tapes and inner cords that operate the product. They can also wrap cords around their necks.
- To avoid strangulation and entanglement, keep cords out of reach of young children.
- Move beds, cots and furniture away from window covering cords.
- Do not tie cords together. Make sure cords do not twist and create a loop.
- Install and use the included safety devices according to the installation instructions on these devices to reduce possibility of such an accident.

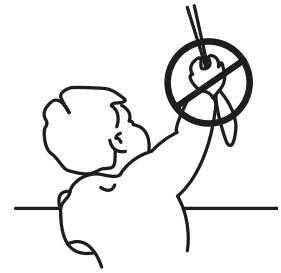

### Operating the Blind

In order to lower the blind pull the rearmost length of chain downwards with a smooth and steady pressure. To raise the blind, do the same on the front length of chain.

## Child Safety Fitting Instructions

