

Ouro Roller Blind

The Ouro roller blind can be fitted within the recess of the window and on the front surface of the window. Available in a reverse or standard roll and the control mechanism (chrome chain) can be on the left- or right-hand side.




Features

Bloc Blinds incorporate a number of specially developed features that enhance the premium quality of our blinds;




Bottom Bar

Roller blinds are available with a welded pocket this provides a seamless finish on the fabric a PVC bar is then inserted in the pocket.

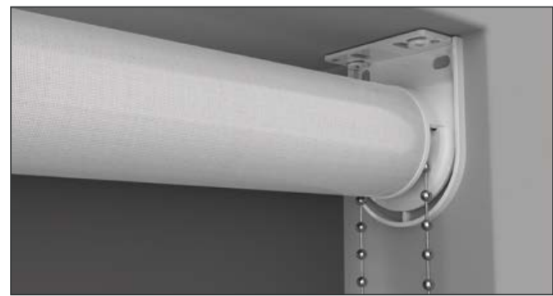

Clutch and chain

The Clutch and chain are used to operate the blind. The chain is cut to length dependant on blind installation height. Metal brackets are supplied with covers.

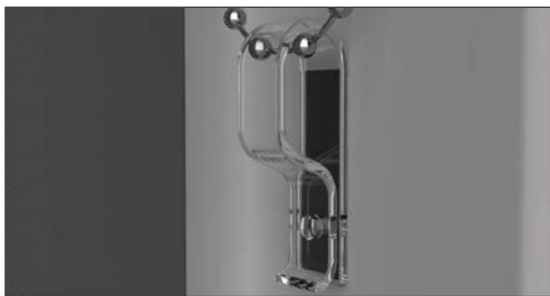

P-Clip


P-Clip attached to the chain ensuring conform to European regulations on child safety.

Metal Brackets in position with fitting options




Metal Brackets

Can be used both outside and inside of the window recess.

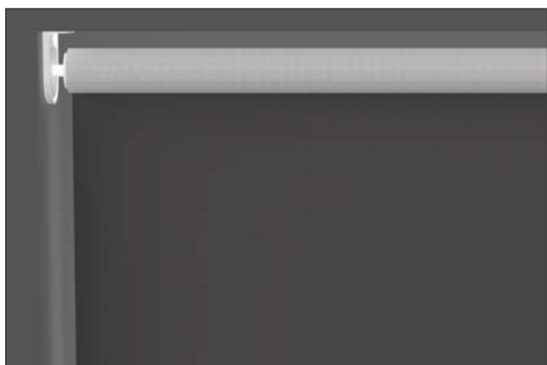

Recess fit
Top and side fix

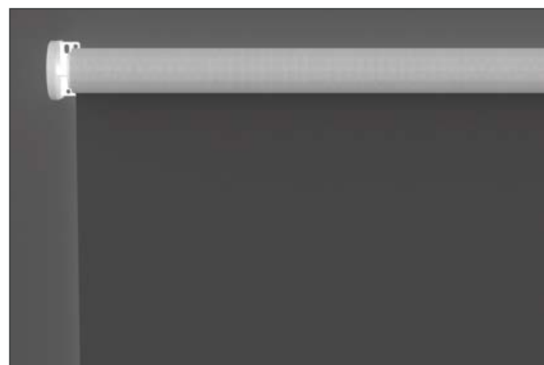

Surface fit

Bracket colour options for metal brackets



White
Matt Finish

PRODUCT SIZE LIMITS : LOUVOLITE SYSTEM 32

Min width: 200mm
Max width: 2000mm
Min drop: 200mm
Max drop: 3000mm

PRODUCT SIZE LIMITS : LOUVOLITE SYSTEM 40

Min width: 2000mm
Max width: 2400mm
Min drop: 200mm
Max drop: 3000mm

Bracket covers included
Chain length dependent on
installation height

Operation

The blind is operated with a chrome chain.

Care

To keep the blind looking its best through time the customer must ensure the product has been installed and operated securely and correctly, the fabric can be cleaned with a synthetic or feather duster and can be wiped lightly with a damp cloth.

Maintenance

Our products do not present any corrosion problems in normal working environments. If there is a failure of a component, it can be replaced without the need for a new complete blind.

Replaceable components:

Clutch & chain